



coupleurs de sécurité conformes à la norme ISO 4414 profil ISO 6150 C-10 série SN40

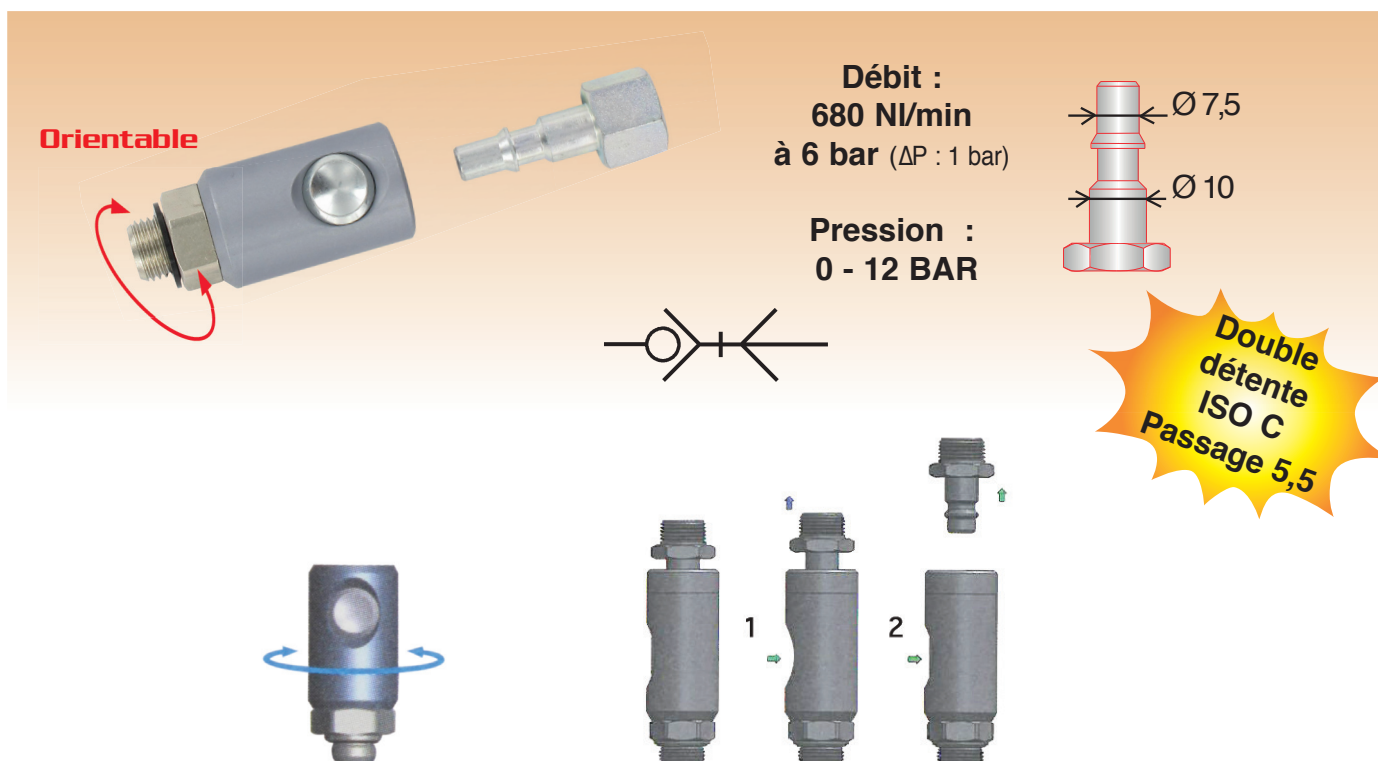

SN 41


implantation mâle BSP cylindrique avec joint monté



CODE	A	B	D	L	CH	DN
SN41 644	1/4	6,5	25	56	21	5,5
SN41 633	3/8	7	25	56	21	5,5
SN41 622	1/2	8,5	25	58,5	25	5,5

SN 42


implantation femelle BSP cylindrique



CODE	A	B	D	L	CH	DN
SN42 644	1/4	9	25	59,5	21	5,5
SN42 633	3/8	10	25	61,5	21	5,5
SN42 622	1/2	11	25	63,5	24	5,5

SN 45

équipé d'une douille cannelée



CODE	Ø Tube	A	D	L	CH	DN
SN45 606	6	7	25	74,5	21	5,5
SN45 608	8	9	25	74,5	21	5,5
SN45 610	10	11	25	74,5	21	5,5